




# Z-8TC

## 8-CH THERMOCOUPLE/mV INPUT MODULE / RS485 MODBUS RTU

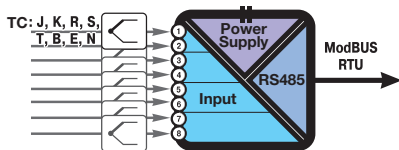

Z-8TC is an interface for Thermocouple sensors (J, K, E, N, S, R, B, T) and generic sensor with mV as standard output signal. The number of input is 8 and each input is independent from each other.

It's a ModBUS Slave and can be coupled with any ModBUS Master device. A 6-way galvanic isolation among Power supply // input // RS485 circuits assures the integrity of your datas (each couple of channels is isolated from the other circuits).

### TECHNICAL SPECIFICATIONS

#### General Data

Power supply	10..40 Vdc / 19..28 Vac / 50-60 Hz
Power consumption	0,6 W
Isolation	1.500 Vac (6 way)
Power transducers	-
Status Indicators	Power supply, error, data transmission, data reception
Protection Degree	IP20
Operating Temperature	-10..+65 °C
Dimension (W x H x D)	17.5 x 100 x 112 mm
Mounting	35 mm DIN rail guide

#### Communication, Memory Process

Interface	2 wire RS485
Speed	Up to 57.600 bps (RS485) 2.400 bps (RS232)
Protocol	ModBUS RTU slave
Communication Time	< 20 ms (@ 38400 baud)
Distance	Up to 1.200 m
Connectivity	Max 32 nodes
Data Memory	EEPROM for the configuration parameters

#### Signals

Channel Numbers	8
Input	TERMOCOUPLE Type J, K, E, N, S, R, B, T VOLTAGE -10,1...81,4 mV


#### Programming

DIP switches	Baud rate, address
Software	EASY Z-8TC (plug&play free software)

#### Standard

Approval	CE, RINA
Norms	EN 61000-6-4/2002, EN 61000-6-2/2002, EN 61010, EN 60742

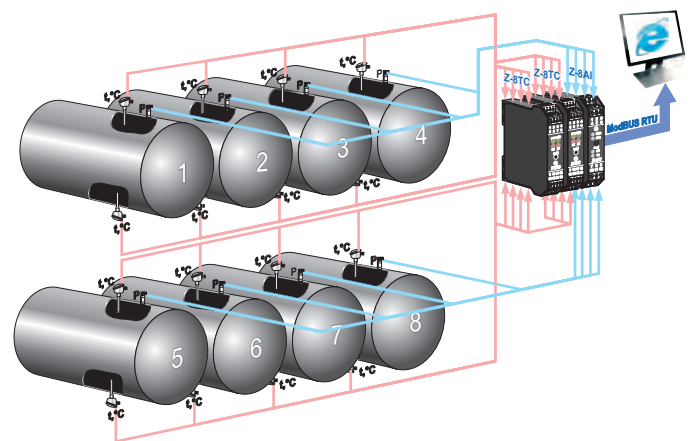

### APPLICATION NOTE






### ORDER CODES

Code	Description
Z-8TC	8-CH thermocouple/mV input module / RS485 ModBUS RTU, 10..40 Vdc / 19..28 Vac

### ACCESSORIES & SOFTWARE

		
<b>Z-PC-DIN</b> Backplane for power & bus communication pg. 36	<b>Z-SUPPLY</b> Switching power supply pg. 36	<b>EASY SETUP</b> Plug&Play configuration software pg. 36

### SIMILAR PRODUCTS

		
<b>Z-DAQ-PID</b> 2-CH universal analog I/O module with PID control pg. 15	<b>Z-4RTD2</b> 4-CH RTD input module / RS485 pg. 19	<b>Z-4TC</b> 4-CH thermocouple/mV input module / RS485 pg. 20



**GUEMISA** (Electrónica Guerra y Miró Guemisa S.L.)  
Sta. Virgilia, 29 - local - 28033 Madrid (Spain)  
Tlfn.: (034) 91 764 21 00 Fax.: (034) 91 764 21 32  
Email.: ventas@guemisa.com Web.: www.guemisa.com