


HVAC Humidity and Temperature Transmitter

Specially designed for HVAC, the DPF160 sensor by DPF Sensors is a cost-effective, highly accurate and reliable solution for measuring relative air humidity and temperature.

The enclosure minimizes installation costs and provides outstanding protection against contamination and condensation, thus ensuring flawless operation.

The DPF160 employs the new humidity/temperature DPF sensor element HCT01 with excellent long term stability and resistance against pollutants. In combination with a long calibration experience, the DPF160 provides a measurement accuracy of $\pm 2.5\%RH$ and is available for wall or duct-mounted with current, voltage or Modbus RTU output.

The configuration equipment allows user setup for the output scaling and for the interface parameters, as well as humidity and temperature adjustment of the sensor.

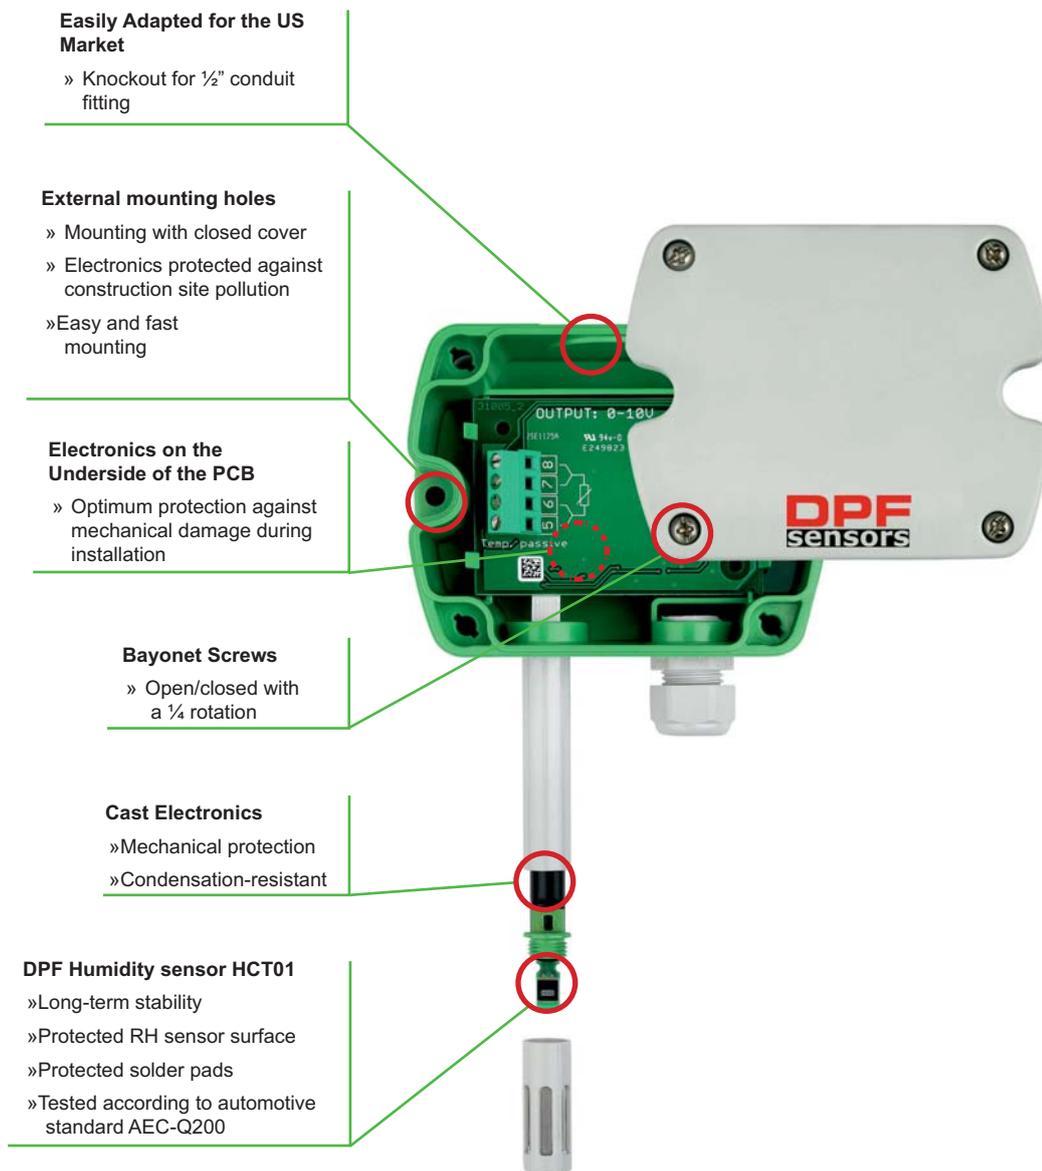

Technical data

Measured values

Relative Humidity

Sensor	DPF Sensor HCT01-00D	
Analog output 0...100% RH	0-10 V	-1 mA < I _L < 1 mA oder
	4-20 mA (two-wire)	R _L < 500 Ohm

Digital output RS485

Working range 10...95% RH

Accuracy at 20°C ±2.5% RH

Temperature dependency typ. ±0.03% RH/°C

Temperature

Sensor Pt1000 (tolerance class B, DIN EN 60751)

Analog output¹⁾
0-10 V
4-20 mA

Digital output RS485

T-Accuracy at 20°C ±0.3°C

passive T-output see ordering code

General

Power supply	
for 0 - 10 V / RS485	15 - 35V DC or 24V AC ±20%
for 4 - 20 mA	10V + R _L x 20 mA < U _v < 35V DC

Current consumption	
Analog	with DC power supply typ. 5mA with AC power supply typ. 13mA _r
Digital	with DC power supply typ. 15mA with AC power supply typ. 25mA _r

Connection Screw terminals, max. 1.5 mm²

Housing / protection class Polycarbonate (UL listed) / IP65

Cable gland M16 x 1.5

Sensor protection membrane filter


Electromagnetic compatibility EN61326-1
EN61326-2-3







Temperature ranges Operating temperature: -15...60°C (5...140°F)
Storage temperature: -25...60°C (-13...140°F)

¹⁾ Output scaling see Ordering Guide

Dimensions (mm)

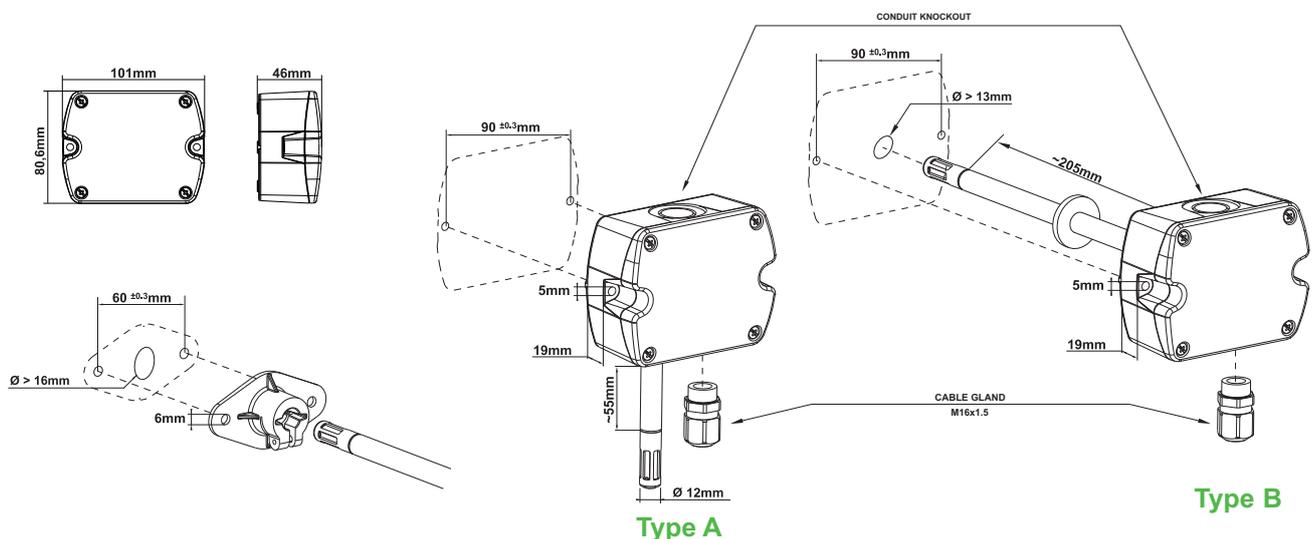

Connection diagram

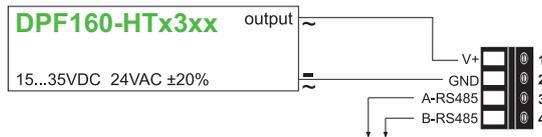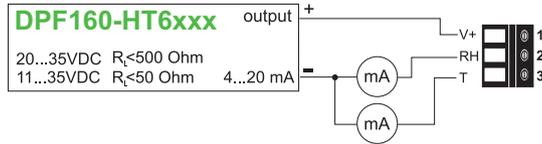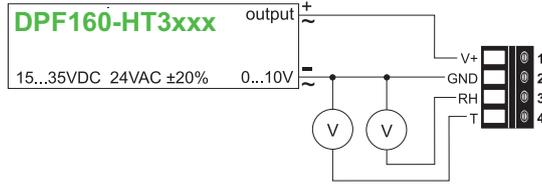

Ordering Guide

Configuration

ModEI	ANALoG ¹⁾	dIGITAI ¹⁾	PASSIVE T-SENSoR ²⁾	HoUSING	TYPE	fil TER
humidity + temperature (HT)	0-10V (3) 4-20mA (6) none (x)	RS485 (3) none (x)	Pt 100 DIN A (A) Pt 1000 DIN A (C) NTC 10k (E) none (x)	polycarbonate (P)	wall mount (A) duct mount (B)	membrane filter (B)
DPF160-						

Interface parameter - analog output

oUTPUT SCAIING	SCAIING		UNIT	
temperature (Tx)	°C	°F	metric (M)	non-metric (N)
	-20...80 (024)	-32...122 (076)		
	-40...60 (002)	-40...140 (083)		
	-10...50 (003)	0...180 (026)		
	0...50 (004)			
	other Scalings see Datasheet „T-Scaling“			

Interface parameter - digital output*

PRoToCol	BAUdRATE	PARITY	SToPBITS	UNIT
modbus (1)	9600 (A)	odd (o)	1 stopbit (1)	metric (M)
	19200 (B)	even (E)	2 stopbit (2)	non-metric (N)
	38400 (C)	no parity (N)		

¹⁾ a combination of analog and digital version is not possible ²⁾ analogue version only



DPF160-EXT

Accessories

Configuration equipment: The configuration equipment allows user setup for the output scaling and for the interface parameters, as well as humidity and temperature adjustment of the sensor.

Position 1:
- configuration adapter (incl. USB cable for PC) (HA011050)

Position 2:
- for DPF160 analog: cable for configuration adapter (HA011059)
- for DPF160 digital: cable for configuration adapter (HA011055)

Position 3:
- configuration software: free of charge; download: www.dpsensors/dpf160.html (2013)

Position 4 - optional:
- power supply for DPF160 (V03)



Order example

Analog output

DPF160-HT6xAPAB-Tx001M
Model: humidity + temperature transmitter
Analog output: 4-20mA
Passive T-Sensor: Pt 100 DIN A
Housing: polycarbonate
Type: wall mounting
Filter: membrane filter

Output scaling: temperature
Scaling: -30...40°
Unit: metric

digital output

DPF160-HTx3xPBB-1AE1N
Model: humidity + temperature transmitter
Digital output: RS485
Housing: polycarbonate
Type: duct mounting
Filter: membrane filter

Protocol: Modbus
Baudrate: 9600
Parity: even
Stopbits: 1
Unit: non-metric